


OTHER SPECIFICATIONS:

(1) POLARIZER:
(2) VIEWING DIRECTION:
(3) CONNECTION:
PIN LENGTH:
(4) OPERATING VOLTAGE:
(5) DRIVING SCHEME: STATIC
V(on):
V(off):
(6) TEMPERATURE RANGE:
OPERATING:
STORAGE:
(7) GRADE:
(8) NOTES:

PIN-OUT CONFIGURATION OF EXCELIX 61000

PIN NO.	1	2	3	4	5	6	7	8	9	10
SEG	BP	E1	D1	C1	DP1	E2	D2	C2	DP2	E3
PIN NO.	11	12	13	14	15	16	17	18	19	20
SEG	D3	NC	NC	NC	NC	C3	NC	DP3	E4	D4
PIN NO.	21	22	23	24	25	26	27	28	29	30
SEG	NC	NC	NC	C4	NC	DP4	E5	D5	NC	NC
PIN NO.	31	32	33	34	35	36	37	38	39	40
SEG	C5	DP5	E8	D8	C8	B8	A8	F8	G8	B5
PIN NO.	41	42	43	44	45	46	47	48	49	50
SEG	A5	F5	G5	CLN2	NC	B4	NC	NC	NC	A4
PIN NO.	51	52	53	54	55	56	57	58	59	60
SEG	F4	G4	NC	NC	B3	NC	NC	A3	F3	G3
PIN NO.	61	62	63	64	65	66	67	68	69	70
SEG	CLN1	B2	A2	F2	G2	B1	A1	G1	F1	BP

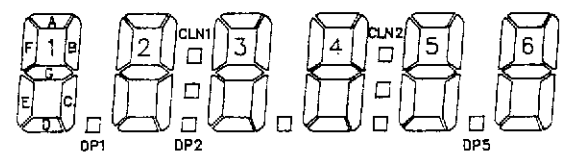

EXCEL TECHNOLOGY INT'L CORP.
 5-4 Stryker Lane, Belle Mead, NJ 08902
 TEL: (908) 874-4747 FAX: (908) 874-3278

MODEL NO.	UNIT	SCALE	DATE
61000	in	0 _____ 1	10/29/96